

## Gateway

# SmartGateway

SmartGateway for AoA-based location infrastructure.



Product visual / illustration from presentation

**Product page**

SmartGateway

info@kutar.com.tr

## Technical specifications

Positioning

**BLE 5.3 AoA**

Connectivity

**Ethernet / Wi-Fi / PoE**

Protection

**IP54 · ABS**

## Model and document information

Values are model specifications stated in the presentations. Battery life depends on usage frequency; positioning accuracy depends on site and installation conditions. Images come from the presentations and include illustrations. Confirm the current model and options when requesting a quote.

Source: Microzerr RTLS - Healthcare · page 3

Tag

# IDTag-AoA

AoA tag solution for equipment and asset tracking.



Product visual / illustration from presentation

**Product page**[IDTag-AoA](#)[info@kutar.com.tr](mailto:info@kutar.com.tr)

## Technical specifications

Connectivity

**BLE 5.3 · NFC · QR**

Battery life

**Up to 5 years**

Detection

**Motion sensor**

Safety

**Tamper alert**

## Model and document information

Values are model specifications stated in the presentations. Battery life depends on usage frequency; positioning accuracy depends on site and installation conditions. Images come from the presentations and include illustrations. Confirm the current model and options when requesting a quote.

Source: Microzerr RTLS - Healthcare · page 3

Badge tag

# IPTAG-AoA

Badge tag for personnel location tracking.



Product visual / illustration from presentation

**Product page**

IPTAG-AoA

info@kutar.com.tr

## Technical specifications

Connectivity

**BLE 5.3 · RFID**

Battery life

**Up to 4 years**

Protection

**IP64**

Safety

**Emergency buttons**

## Model and document information

Values are model specifications stated in the presentations. Battery life depends on usage frequency; positioning accuracy depends on site and installation conditions. Images come from the presentations and include illustrations. Confirm the current model and options when requesting a quote.

Source: Microzerr RTLS - Healthcare · page 4

Wristband tag

# IWTAG-AoA

Wristband tag for patient location tracking.



Product visual / illustration from presentation

**Product page**

IWTAG-AoA

info@kutar.com.tr

## Technical specifications

Connectivity

**BLE 5.3**

Battery life

**Up to 2 years**

Protection

**IP68**

Detection

**Motion and fall detection**

Safety

**Tamper alert**

## Model and document information

Values are model specifications stated in the presentations. Battery life depends on usage frequency; positioning accuracy depends on site and installation conditions. Images come from the presentations and include illustrations. Confirm the current model and options when requesting a quote.

Source: Microzerr RTLS - Healthcare · page 4

Stationary monitoring gateway

# Termon CoolHub

Gateway for temperature and humidity monitoring at fixed locations.



Product visual from Termon.io

**Product page**

Termon CoolHub

info@kutar.com.tr

## Technical specifications

Connectivity

Wi-Fi · Ethernet · LTE

Sensor capacity

16 BLE 5.3 sensors

Battery backup

620 mAh · Up to 36 hours

Offline storage

Up to 30 days

Alarms

Audible and visual

Firmware updates

OTA

## Model and document information

Specifications have been confirmed by Kutar. Downloadable manufacturer documents may cover different or earlier variants; current model information is provided on this page. 16 sensors; up to 30 days of offline storage; up to 36 hours of battery backup with a 620 mAh battery.

Kutar: Termon.io · 15.10.2026

<https://termon.io/#products>

Mobile monitoring gateway

# Termon FrostHub

Gateway for temperature and location monitoring during transport.



Product visual / illustration from presentation

**Product page**

Termon FrostHub

info@kutar.com.tr

## Technical specifications

Connectivity

**4G · GPS · BLE**

Power

**12-48 V**

Backup battery

**2500 mAh · Up to 48 hours**

Offline storage

**240 h**

Detection

**Motion sensor**

## Model and document information

FrostHub: a model from the presentation. Termon.io does not list a product card under this name, so its original presentation image and specifications are retained. Values are model specifications stated in the presentations. Battery life depends on usage frequency; positioning accuracy depends on site and installation conditions. Images come from the presentations and include illustrations. Confirm the current model and options when requesting a quote.

Source: Termon - Cold Chain Monitoring · page 3

Temperature sensor family

# Termon CoolTag

CoolTag temperature, CoolTag-TH temperature and humidity, and Logger storage options for refrigerators, rooms and healthcare environments.



Product visual from Termon.io

**Product page**

Termon CoolTag

info@kutar.com.tr

## Technical specifications

Connectivity

**BLE**

Battery life

**Up to 7 years**

Temperature accuracy

 **$\pm 0.1$  °C**

Measurement range

**-50...+65 °C**

Protection

**IP64**

CoolTag Logger storage

**30 days**

## Model and document information

Specifications have been confirmed by Kutar. Downloadable manufacturer documents may cover different or earlier variants; current model information is provided on this page. CoolTag and Logger:  $\pm 0.1$  °C, -50...+65 °C, IP64. Logger adds 30 days of storage. CoolTag-TH measures temperature and humidity:  $\pm 0.3$  °C, -40...+65 °C,  $\pm 2\%$  RH (25 °C), IP64. CoolTag family battery life is up to 7 years.

Kutar: Termon.io · 15.10.2026

<https://termon.io/#products>

Temperature sensor

# Termon FrosTag

External-probe temperature sensor for cold and frozen applications.



Product visual from Termon.io

**Product page**

Termon FrosTag

info@kutar.com.tr

## Technical specifications

|                      |                |
|----------------------|----------------|
| Temperature accuracy | <b>±0.1 °C</b> |
|----------------------|----------------|

|                   |                      |
|-------------------|----------------------|
| Measurement range | <b>-100...+85 °C</b> |
|-------------------|----------------------|

|            |               |
|------------|---------------|
| Conversion | <b>16-bit</b> |
|------------|---------------|

## Model and document information

Specifications have been confirmed by Kutar. Downloadable manufacturer documents may cover different or earlier variants; current model information is provided on this page. FrosTag external-probe measurement range: -100...+85 °C.

Kutar: Termon.io · 15.10.2026

<https://termon.io/#products>

## Software

# SECMON

Software for patrols, checkpoints and field notifications.



Original presentation cover

**Product page**

SECMON

info@kutar.com.tr

## Technical specifications

Verification

**GPS / RFID**

Operations

**Route planning and personnel tracking**

Reporting

**Performance and security reports**

## Model and document information

Values are model specifications stated in the presentations. Battery life depends on usage frequency; positioning accuracy depends on site and installation conditions. Images come from the presentations and include illustrations. Confirm the current model and options when requesting a quote.

Source: SECMON - Security Route Tracking · page 4-9

Stationary monitoring gateway

# Termon STC-WEL

Wall-mounted gateway with Wi-Fi, Ethernet and LTE for vaccine refrigerators and clinical rooms.



Product visual from Termon.io

**Product page**

Termon STC-WEL

info@kutar.com.tr

## Technical specifications

Connectivity

**Wi-Fi · Ethernet · LTE**

Sensor capacity

**16 BLE 5.3 sensors**

Battery backup

**24 hours**

Offline storage

**30 days**

Alarms

**Audible and visual**

Firmware updates

**OTA**

## Model and document information

Specifications follow the product cards on Termon.io. Documents may list different values for different models and configurations. Battery life depends on usage conditions; confirm the model, hardware revision and applicable document before ordering.


Manufacturer product information: Termon.io · 15.10.2026

<https://termon.io/#products>

Mobile cold-chain tracker

# Termon STC-GPS

Tracker combining LTE, GPS and up to four BLE sensors for transport and fleet operations.

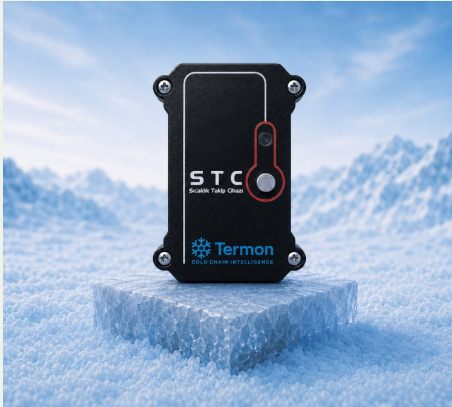

Product visual from Termon.io

**Product page**

Termon STC-GPS

info@kutar.com.tr

## Technical specifications

Connectivity

**LTE**

Location

**GPS · Shipment location**

Sensor capacity

**Up to 4 BLE sensors**

Power

**Internal battery**

Motion

**Accelerometer**

## Model and document information

Specifications follow the product cards on Termon.io. Documents may list different values for different models and configurations. Battery life depends on usage conditions; confirm the model, hardware revision and applicable document before ordering.

Manufacturer product information: Termon.io · 15.10.2026

<https://termon.io/#products>